

PRICING & SPECIFICATION GUIDE
Introduction: Power-Data

May 7, 2025

TUOHY



Introduction: **Power-Data**

Microphone	17
Shelf Lights	17
Wire Management	18
Raceway Channels	18
Cavo Cable Drop	18
Wire Management Basket	18
Top Grommets	19
Vertical Grommets	19
Perimeter Power-Data	20
Power-Data Aprons	20
Dean	21
Garcia	21
Surface Power-Data	22
Burelé	22
Node	22
MhoB	22
Dean Z-Mount	23
Slide Units	24
Swivel Units	25
Static Units	25
Power-Comm Recessed Console	26
TAS Tech-Accessory System	27
Power-Comm Troughs	28
Connector Modules	30


MICROPHONE



Mounts on Any Surface	Product No.	List \$
Microphone (Black)	S2E.Q00.000	1613

Note: Specify permanent location desired.
Includes table top mounting plate and XLR plug in 12 inch gooseneck microphone.

SHELF LIGHTS




	Product No.	List \$
Shelf Light 24	501.2024	307
Shelf Light 36	501.2036	375
Shelf Light 48	501.2048	469
Shelf Light 60	501.2060	553
Shelf Light 72	501.2072	676

TUOHY offers five sizes of shelf task lighting that can be field mounted at any location.
These are fluorescent fixtures with a prismatic diffuser lens, UL Listed.
Standard housing color is black.

Each light has a 9-foot power cord. Power cords for Chicago (all but 72w), LA and New York are available; inquire regarding ordering information.

RACEWAY CHANNELS

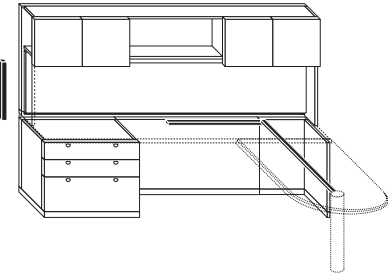

Raceway Channels (Black)	Product No.	List \$
(2) Raceways @ 22 plus 3 clips	501.3000	102

Contains two pieces of wire raceway, 22 inches long, and three clips for inner-cabinet wire management. Standard color is black. Raceways may be snapped open/close. See diagram for possible mounting applications; suitable for above work surface areas as well as under surface locations.


CAVO CABLE DROP
Design by Fig40




30-in Nominal Desk Height	Product No.	List \$
White (white spandex thread)	WMCD30WH	291
Black (black spandex thread)	WMCD30BL	291
Steel (black spandex thread)	WMCD30ST	291

40-in Nominal Standing Height	Product No.	List \$
White (white spandex thread)	WMCD40WH	315
Black (black spandex thread)	WMCD40BL	315
Steel (black spandex thread)	WMCD40ST	315

All colors come with either white or black spandex thread.
Additional colors are available upon request; use the following link to review color choices:
www.visionknit.ca/furniture-industry-yarn-inventories.html
Custom colors are also available, but subject to a one-time mixing charge per order, as follows:
For 30-inch nominal height socks the mixing charge is \$603 List.
For 40-inch nominal height socks the mixing charge is \$737 List.

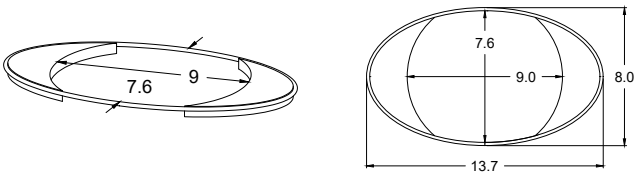

WIRE MANAGEMENT BASKET



Wire Management Basket, 36w	Product No.	List \$
	WMB	424

Finished MRB Resin Black.
Includes 6-outlet surge protector.

TOP GROMMETS




Top grommets must be specified individually (Option GT). Standard default locations are defined below. You may specify any location you prefer; a detailed drawing must accompany your order.

	Specify	List \$
Top Grommet	Option GT	230
Specify finish code:		
	Black Metal	BL
	Black Plastic	BP
	Brass Polished	BR
	Bronze	BZ
	Chrome Polished	CH
	Nickel Brushed	BN

Standard Location


Top Grommets are located on the rear outside corner of pedestals on a standard basis.

The plan view below demonstrates how Top Grommets are applied to a double pedestal desk on a standard basis.




Standard Top Grommet locations are shown below for single pedestal desks, bridges and credenzas.

Runoffs have grommets located in the manner that credenzas do.

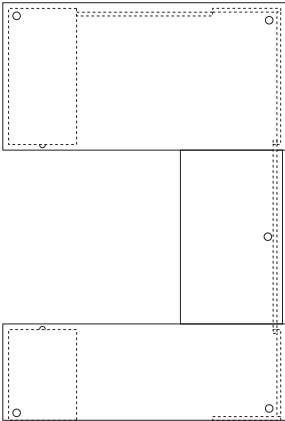

Alternate Locations

Grommets may be located on the rear inside corner of pedestals. If you compare the drawing below to those elsewhere on this page, it is easy to extrapolate how this inside location is adapted throughout, if desired. Be sure to specify Option GS for this alternate placement.



VERTICAL GROMMETS



Vertical grommets may also be adapted to any side of a tower, to desks, and to modular pedestals and modesty panels when an exit cord grommet is needed

Plastic	Specify	List \$
Vertical Grommet, Black	Option GV	155


Default Locations

Desks and Runoffs: Kneehole area, just below the top.
Modular pedestals: On center at rear, just below the top.

Towers: On center at rear, 42 from the floor.
Overheads: On center or just right of center (as needed), 3 above bottom shelf.

PERIMETER POWER-DATA

Power-Data Aprons




Product No. Prefix	Apron Size (in.)	(-) # Outlet Pairs					
PDAP...			...-1	...-2	...-3	...-4	...-5
		List \$	849	1698	2547	3396	4245
	...18...	441	18-in	-	-	-	-
	...24...	454	24-in	-	-	-	-
	...30...	470	30-in	-	-	-	-
	...36...	483	36-in	23-in	-	-	-
	...48...	513	48-in	24-in	-	-	-
	...60...	543	60-in	30-in	23-in	-	-
	...72...	573	72-in	36-in	24-in	-	-
	...84...	602	84-in	42-in	28-in	23-in	-
	...96...	632	96-in	48-in	32-in	24-in	-
	...108...	663	108-in	54-in	36-in	27-in	24-in
	...120...	693	120-in	60-in	40-in	30-in	24-in

Nominal o.c. spacing


! Notes:
Steel aprons are 1d 2.5h at widths shown above; standard (default) finish is MRTG Resin Thunder Gray
Default/suggested apron set back is 8-inches.
Units are an 8 wire, 4 circuit system, meant to be a single hardwire inlet, units to be daisy chained.
72-inch softplug cord is an in-feed with 20 Amp plug and is UL-Recognized, not UL-Approved.
PDAP and PDAPSP options: Each outlet pair consists of (2) power outlets and (2) USB A+C outlets.
PDAP option is intended for use in all markets except Chicago. Check your local electrical codes before selecting the PDAPSP option.
PDAPCC option: Each station includes two 15A 125V outlets and a 5.2A USB Type-A/Type-C Charger.
No whips or cords provided for Chicago Code option.
For A/V or Data connectors to add to Aprons see page 31.
Pricing includes Apron, outlets and all cables except where noted.

+ Options/Parametrics:
For Softplug option w/120-in power cord, use Prod.No.Prefix PDAPSP...; add \$93 to the total List \$.
For Chicago Code option, use Prod.No.Prefix PDAPCC...; no price change.
For casegoods, widths can be specified 18-120. Replace product number prefix with desired width; use next larger size for price.
For conference tables, use perimeter of table as the product number prefix; use length and width (x2) for pricing see example below.
Specify resin color for Aprons:
MRTG Resin Thunder Gray (default, if not specified)
MRW Resin White
MRB Resin Black
MRSA Resin Satin Aluminum



> To order for casegoods (see chart above, use next larger Apron Size where needed):
1. Locate Apron Size (size of opening) and # Power-Data Outlet Pairs; e.g.: 36, 2.
2. Determine Product Number by merging the Prefix, Apron Size and # Outlet Pairs; e.g., PDAP36-2.
3. Determine List \$ by adding the Apron price and the Outlets price; e.g., 483 + 1698 = \$2181.

> To order for conference tables (see chart above, use next larger Apron Size where needed):
1. Calculate the table perimeter; e.g., 120w 52d table = 120 + 52 + 120 + 52 = 344 inches.
2. Determine number of outlets needed/desired; e.g., 3 + 1 + 3 + 1 = 8.
3. Determine Product Number by merging Prefix, table perimeter, and # Outlet Pairs; e.g., PDAP344-8.
4. Determine List \$ by adding the sum of prices for Apron Sizes and the sum of Outlets prices;
e.g., (693 + 543 + 693 + 543) + (2547 + 849 + 2547 + 849) = \$9264
For Soft Plug option Product Number becomes PDAPSP344-8:
e.g., (693 + 543 + 693 + 543) + (2547 + 849 + 2547 + 849) = \$9264 + \$93 = 9357

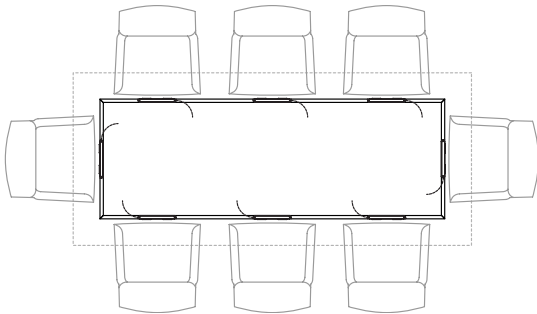

PERIMETER POWER-DATA (cont.)

Dean



Power Option	Softplug		Softplug+CircuitBreaker		Hardwire	
	ProdNo.	Prefix	List \$	ProdNo.	Prefix	List \$
2-Port: (2) Splx	ELD220S...		355	ELD220C...		416
2-Port: (1) Splx, (1) USB-A+C	ELD211S...		473	ELD211C...		532
• 3-Port: (2) Splx, (1) USB-A+C	ELD321S...		497	ELD321C...		554
4-Port: (2) Splx, (2) USB-A+C	ELD422S...		722	ELD422C...		781
5-Port: (2) Splx, (1) USB-A+C, (1) USB-A+C100	ELD522S...		887	ELD522C...		948
Material:	...Suffix					
• White	...WH					
Black	...BLK					
Storm	...STR					
Fog	...FOG					

> To Order:
For product numbers, append the Material Suffix to the Prefix Code; read across and down for list price.
Ex: For 2-Port with two simplex outlets, softplug unit in white, product number is ELD220SWH; list price is \$355.

! Notes:
Includes 6-ft UL Listed power cord. 10-ft cord available upon request.
Dean's housing is clear anodized aluminum. The faceplate is molded plastic and the trim is Resin coated steel.
The Corded Dean can be used in New York City, as per the NYC Electrical Code.
The Hardwired Dean must be used on all furnishings in Chicago.
To use with Interlink IQ 2.0 contact your Customer Service Representative.

Splx = 15A 125V Simplex Outlet
USB-A+C = USB-A 2.1A & UCB-C 18 watts (uses one port)
USB-C45 = USB-C Outlet, 45 watts (uses one port)
USB-C100 = USB-C Outlet, 100 watts (uses two ports)

Garcia 2-Trac




Power Option	List \$
• 2-Port: (2) USB-A	Quote
2-Port: (1) USB-A, (1) USB-C	Quote

! Notes:
Available colors: White, Black, Storm, and Fog
AC Infeed cord length can be up to 177-in. DC cord lengths can be up to 70-in.
USB-A is 2.1 amps per port.
USB-C is 18 watts.
Low-voltage unit.
A blue LED light lets users know that charging is available, and brightens when a device is plugged in.
Garcia is molded plastic.
Maximum of 5 Garcia units with 1-2 hubs.
Contact Customer Service to order unit specific to your needs.

SURFACE POWER-DATA

Burelé®



Power Option	Softplug ProdNo. Prefix	List \$	Softplug+CircuitBreaker ProdNo. Prefix.	List \$
• 4-Port: (2) Splx, (2) USB-A+C	ELBU422S...	743	ELBU422C...	802
Material	...Suffix			
• Gloss White	...WH			
Gloss Black	...BLK			

> To Order:

For product numbers, append the Material Suffix to the Prefix Code; read across and down for list price.

Ex: For 4-Port, softplug unit in gloss white, product number is ELBU422SWH; list price is \$743.

! Notes:

Includes 6-ft UL Listed power cord. 10-ft cord available upon request.

USB-A+C = USB-A 2.1A & UCB-C 18 watts (uses one port)

The Corded Dean can be used in New York City, as per the NYC Electrical Code.

Node



Power Option	Softplug Product No.	List \$	Softplug+CircuitBreaker Product No.	List \$	Hardwire Product No.	List \$
2-Port: (2) Simplex						
Satin nickel, plated	ELN220SSP	383	ELN220CSP	443	ELN220HSP	459
• Parchment resin coat	ELN220SPR	256	ELN220CPR	316	ELN220HPR	333
Dark bronze, plated	ELN220SBP	383	ELN220CBP	443	ELN220HBP	459
Midnight resin coat	ELN220SMR	256	ELN220CMR	316	ELN220HMR	333
Trivalent chrome, white simplex	ELN220STC	318	ELN220CTC	380	ELN220HTC	396
2-Port: (1) Simplex, (1) USB-A+C						
Satin nickel, plated	ELN211SSP	508	ELN211CSP	553	ELN211HSP	573
• Parchment resin coat	ELN211SPR	383	ELN211CPR	442	ELN211HPR	447
Dark bronze, plated	ELN211SBP	495	ELN211CBP	553	ELN211HBP	585
Midnight resin coat	ELN211SMR	383	ELN211CMR	442	ELN211HMR	447
Trivalent chrome, white simplex	ELN211STC	445	ELN211CTC	505	ELN211HTC	510

! Notes:

Includes 6-ft UL Listed power cord. 10-ft cord available upon request.

USB-A+C = USB-A 2.1A & UCB-C 18 watts (uses one port)

The Corded Node can be used in New York City, as per the NYC Electrical Code.

To use with Interlink IQ 2.0 contact your Customer Service Representative.

MhoB



Power Option	Softplug ProdNo. Prefix	List \$	Softplug+CircuitBreaker ProdNo. Prefix.	List \$	Hardwire ProdNo. Prefix.	List \$
2-Port: (2) Splx	ELM220S...	424	ELM220C...	484	ELM220H...	502
2-Port: (1) Splx, (1) USB-A+C	ELM211S...	543	ELM211C...	603	ELM211H...	620
• 3-Port: (2) Splx, (1) USB-A+C	ELM321S...	567	ELM321C...	627	ELM321H...	644
4-Port: (1) Splx, (1) USB-A+C, (1) HDMI, (1) RJ45	ELM413S...	776	ELM413C...	837	ELM413H...	852
• 4-Port: (2) Splx, (1) USB-A+C, (1) USB-C45	ELM422S...	793	ELM422C...	852	ELM422H...	868
5-Port: (2) Splx, (1) USB-A+C, (1) USB-C100	ELM522S...	993	ELM522C...	1053	ELM522H...	1070
5-Port: (2) Splx, (1) USB-A+C, (1) HDMI, (1) RJ45	ELM523S...	834	ELM523C...	895	ELM523H...	908
Material:	...Suffix					
• Gloss White Resin Coat	...WH					
Gloss Black Resin Coat	...BLK					
Silver Resin Coat / Black Trim	...SLV					

> To Order:

For product numbers, append the Material Suffix to the Prefix Code; read across and down for list price.

Ex: For 2-Port w/ two simplex outlets, softplug unit in Gloss White Resin Coat, ProdNo is ELM220SWH; list price is \$424.

! Notes:

Includes 6-ft UL Listed power cord. 10-ft cord available upon request.

Resin coated aluminum housing and grommet.

The Corded MhoB can be used in New York City, as per the NYC Electrical Code.

The Hardwired MhoB must be used on all furnishings in Chicago.

To use with Interlink IQ 2.0 contact your Customer Service Representative.

Splx = 15A 125V Simplex Outlet

USB-AA = Dual USB-A 2.1 per port

USB-A+C = USB-A 2.1A & UCB-C 18 watts (uses one port)

USB-C45 = USB-C Outlet, 45 watts (uses one port)

USB-C100 = USB-C Outlet, 100 watts (uses two ports)

Dean Z-Mount




Power Option	Softplug		Softplug+CircuitBreaker		Hardwire	
	ProdNo.	Prefix	ProdNo.	Prefix	ProdNo.	Prefix
2-Port: (2) Splx	ELDZ220S...		ELDZ220C...		ELDZ220H...	
2-Port: (1) Splx, (1) USB-A+C	ELDZ211S...		ELDZ211C...		ELDZ211H...	
• 3-Port: (2) Splx, (1) USB-A+C	ELDZ321S...		ELDZ321C...		ELDZ321H...	
Material	...Suffix					
• White	...WH					
Black	...BLK					
Storm	...STR					
Fog	...FOG					

- > To Order:
For product numbers, append the Material Suffix to the Prefix Code; read across and down for list price.
Ex: For 2-Port w/ two simplex outlets, softplug unit in White, product number is ELDZ220SWH; list price is \$355.
- ! Notes:
Includes 6-ft UL Listed power cord. 10-ft cord available upon request.
USB-A+C = USB-A 2.1A & UCB-C 18 watts (uses one port)
Dean's housing is clear anodized aluminum. The faceplate is molded plastic and the trim is Resin coated steel.
The Corded Dean Z can be used in New York City, as per the NYC Electrical Code.
The Hardwired Dean Z must be used on all furnishings in Chicago.
To use with Interlink IQ 2.0 contact your Customer Service Representative.

SURFACE POWER-DATA (cont.)

Single Slide





Power Option	Prefix Code	Lid Material /...Code...						
		Wood 1	Wood 2	Fenix®	OcuGlass	AcrylicSS	Quartz	Marble
Single Slide Units		...W1...	...W2...	...L...	...J...	...C...	...Q...	...M...
• Single Slide 15.5w 5.5d	ELSLS5...	2028	2170	2071	2168	2087	3598	3151
• Single Slide 15.5w 9d	ELSLS9...	2044	2187	2113	2279	2143	4100	3489


Power Supply Option: For softplug append suffix ...SP and for hardwire append ...HW

> To Order:
For product numbers, append the Lid Material Code to the Prefix Code and add the Power Supply suffix.
For list price, read across from Prefix Code and down from Lid Material Code; price includes Power Supply option.
Ex: For Wood1 Single Unit Slide with 5.5d door, hardwire option, product number is ELSLS5W1HW; list price is \$2028.

! Notes:
Includes (2) Byrne Dean units with duplex outlet and USB A+C combo. USB-A is 2.1 amps. USB-C is 10 watts.
Also includes two blank data plates. See connector module pages in Power-Data price list to order data connectors.
Power box color is Thunder Gray.
Byrne Dean color is Storm and includes a 6-ft UL Listed cord; a 10-ft cord is available upon request.
The softplug option passes the NYC Electrical Code; the hardwire option is required on all furnishings in Chicago.

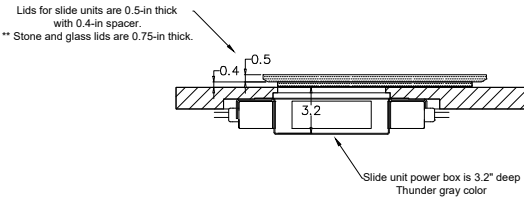

Double Slide





Power Option	Prefix Code	Lid Material /...Code...						
		Wood 1	Wood 2	Fenix®	OcuGlass	AcrylicSS	Quartz	Marble
Double Slide w Static Island, 5.5d		...W1...	...W2...	...L...	...J...	...C...	...Q...	...M...
• Dbl Slide 54w: Door15, Island24, Door15	ELSLD554...	3341	3575	3487	3834	3551	7832	9068
• Dbl Slide 60w: Door15, Island30, Door15	ELSLD560...	3350	3585	3511	3897	3582	7832	9433
• Dbl Slide 66w: Door15, Island36, Door15	ELSLD566...	3358	3593	3536	3960	3614	7832	9745
• Dbl Slide 72w: Door15, Island42, Door15	ELSLD572...	3368	3604	3563	4020	3647	7832	10084
• Dbl Slide 78w: Door15, Island48, Door15	ELSLD578...	3377	3613	3586	4082	3679	7844	10450
• Dbl Slide 84w: Door15, Island54, Door15	ELSLD584...	3395	3633	3611	4144	3710	7844	10761
Double Slide w Static Island, 9d		...W1...	...W2...	...L...	...J...	...C...	...Q...	...M...
• Dbl Slide 54w: Door15, Island24, Door15	ELSLD954...	3397	3635	3639	4220	3749	9020	8912
• Dbl Slide 60w: Door15, Island30, Door15	ELSLD960...	3413	3652	3682	4324	3802	9020	9173
• Dbl Slide 66w: Door15, Island36, Door15	ELSLD966...	3427	3667	3723	4427	3855	9115	9459
• Dbl Slide 72w: Door15, Island42, Door15	ELSLD972...	3443	3684	3765	4530	3908	9261	9745
• Dbl Slide 78w: Door15, Island48, Door15	ELSLD978...	3458	3700	3806	4635	3961	9391	10032
• Dbl Slide 84w: Door15, Island54, Door15	ELSLD984...	3487	3731	3848	4737	4014	9527	10293

Power Supply Option: For softplug append suffix ...SP and for hardwire append ...HW


> To Order:
For product numbers, append the Lid Material Code to the Prefix Code and add the Power Supply suffix.
For list price, read across from Prefix Code and down from Lid Material Code; price includes Power Supply option.
Ex: For Wood1 Dbl Slide w Static Island, 54w w/ 5.5d door, hardwire, ProdNo is ELSLD554W1HW; list price is \$3341.

! Notes:
Includes (2) Byrne Dean units under each lid with duplex outlet and USB A+C combo. USB-A is 2.1 amps. USB-C is 10 watts.
Also includes two blank data plates. See connector module pages in Power-Data price list to order data connectors.
Power box color is Thunder Gray.
Byrne Dean color is Storm and includes a 6-ft UL Listed cord; a 10-ft cord is available upon request.
The softplug option passes the NYC Electrical Code; the hardwire option is required on all furnishings in Chicago.

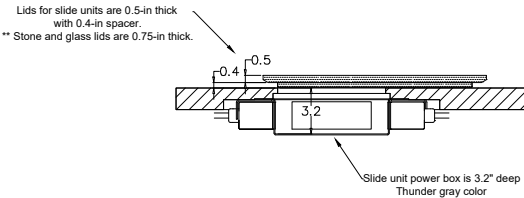

SURFACE POWER-DATA (cont.)

Swivel

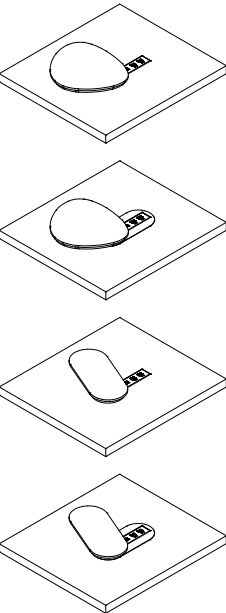




Power Option	Prefix Code	Lid Material /...Code...						
		Wood 1	Wood 2	Fenix®	OcuGlass	AcrylicSS	Quartz	Marble
Swivel Pebble Lid		...W1...	...W2...	...L...	...J...	...C...	...Q...	...M...
• Pebble Lid (for wood tops only)	ELSWP...	1709	1829	1793	1997	1831	4151	3276
• Pebble Lid w Insert (for all tops)	ELSWPI...	1823	1951	1908	2111	1945	4263	3388
Swivel Racetrack Lid		...W1...	...W2...	...L...	...J...	...C...	...Q...	...M...
• Racetrack Lid (for wood tops only)	ELSWR...	1691	1809	1746	1880	1772	4151	2936
• Racetrack Lid w Insert (for all tops)	ELSWRI...	1805	1931	1861	1993	1886	4263	3048

Power Supply Option: For softplug append suffix **...SP** and for hardwire append **...HW**


> To Order:
For product numbers, append the Lid Material Code to the Prefix Code and add the Power Supply suffix.
For list price, read across from Prefix Code and down from Lid Material Code; price includes Power Supply option.
Ex: For Wood1 Pebble Swivel Lid, hardwire option, product number is ELSWPW1HW; list price is \$1709.

! Notes:
Approximate size of Pebble lid is 11.5-in x 12.8-in; Racetrack lid is 14w x 6d.
Inserts must be used on all tops other than wood tops.
Standard Insert color is Thunder Gray. For White Insert, specify White Insert; for Black Insert, specify Black Insert.
Includes 6-ft UL Listed cord. 10-ft cord available upon request.
Includes (1) Byrne Dean unit with duplex outlet and USB A+C combo. USB-A is 2.1 amps. USB-C is 10 watts.
Byrne Dean unit color is Storm.
The softplug option passes the NYC Electrical Code; the hardwire option is required on all furnishings in Chicago.

Lids for swivel units are 0.5-in thick with 0.4-in spacer.
** Stone and glass lids are 0.75-in thick.

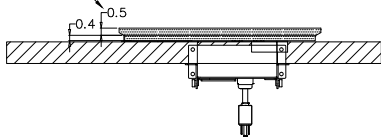

Static




Power Option	Prefix Code	Outer Material /...Code...						
		Wood 1	Wood 2	Fenix®	OcuGlass	AcrylicSS	Quartz	Marble
5.5d Static Unit		...W1...	...W2...	...L...		...C...		
• Static 54w 5.5d: Dean9 Insert36 Dean9	ELST554...	3060	3274	3200	—	3262	—	—
Static 60w 5.5d: Dean9 Insert42 Dean9	ELST560...	3085	3301	3240	—	3310	—	—
Static 66w 5.5d: Dean9 Insert48 Dean9	ELST566...	3109	3327	3283	—	3358	—	—
Static 72w 5.5d: Dean9 Insert54 Dean9	ELST572...	3134	3353	3323	—	3407	—	—
Static 78w 5.5d: Dean9 Insert60 Dean9	ELST578...	3161	3382	3365	—	3456	—	—
Static 84w 5.5d: Dean9 Insert66 Dean9	ELST584...	3187	3410	3407	—	3503	—	—
9d Static Unit		...W1...	...W2...	...L...		...C...		
• Static 54w 9d: Dean9 Insert36 Dean9	ELST954...	3114	3332	3350	—	3452	—	—
Static 60w 9d: Dean9 Insert42 Dean9	ELST960...	3146	3366	3407	—	3522	—	—
Static 66w 9d: Dean9 Insert48 Dean9	ELST966...	3177	3399	3464	—	3592	—	—
Static 72w 9d: Dean9 Insert54 Dean9	ELST972...	3209	3434	3522	—	3661	—	—
Static 78w 9d: Dean9 Insert60 Dean9	ELST978...	3240	3467	3579	—	3731	—	—
Static 84w 9d: Dean9 Insert66 Dean9	ELST984...	3271	3500	3637	—	3799	—	—

Power Supply Option: For softplug append suffix **...SP** and for hardwire append **...HW**

> To Order:
For product numbers, append the Outer Material Code to the Prefix Code and add the Power Supply suffix.
For list price, read across from Prefix Code and down from Outer Material Code; price includes Power Supply option.
Ex: For Wood1 Static Unit, 54w 5.5d, hardwire option, product number is ELST554W1HW; list price is \$3060.

! Notes:
Includes 6-ft UL Listed cord. 10-ft cord available upon request.
Includes (2) Byrne Dean units with duplex outlet and USB A+C combo (5V, 2 AMP each).
Byrne Dean unit color is black.
Insert material is FenixNTM® Nero Ingo 0720 (black).
The softplug option passes the NYC Electrical Code; the hardwire option is required on all furnishings in Chicago.



SURFACE POWER-DATA (cont.)

Power-Comm Recessed Consoles



Matching Veneer (13.8w 6.4d flush-to-surface)	Specify for Black	Specify for White	List \$
Interface G2 UT w/ 72-in Power Cord	Option GC	Option GCW	2253
Interface G2 UT for Hardwiring	Option GC-HW	Option GCW-HW	2733

- Contains
- (4) AC-power outlets
 - (1) convenience outlet
 - (2) 2.1 amp USB
 - (1) telecom plate w/ (2) RJ45 Cat 6 Data and HDMI connectors
 - (2) Blank Telecom Plates.

Contact Customer Service for other telecom plate options.
Modules and face plates are black or white, as listed above; mounting is to sub-top.
Hinged wood top with matching veneer and finish; solid colors available.
Option GC includes a 6-foot UL-approved power cord.
Specify location and quantity; include a drawing with your purchase order.

Matching Veneer (8w 4.5d flush-to-surface)	Specify for Black	Specify for White	List \$
Interact G2 UT w/ 72-in Power Cord	Option GCS	Option GCSW	1274
Interact G2 UT for Hardwiring	Option GCS-HW	Option GCSW-HW	1364

- Contains
- (2) AC-power outlets
 - (1) convenience outlet
 - (2) 2.1 amp USB
 - (1) Blank Telecom Plate
 - (2) RJ45 Cat 6 Data
 - (2) Cord Pass-Throughs.

Contact Customer Service for other telecom plate options.
Modules and face plates are black or white, as listed above; mounting is to sub-top.
Hinged wood top with matching veneer and finish; solid colors available.
Option GCS includes a 6-foot UL-approved power cord.
Specify location and quantity; Include a drawing with your purchase order.

SURFACE POWER-DATA (cont.)

TAS Tech-Accessory System




	Modules w MRBAS Lid	w	2.8d	4.5h	ProductNo.	List \$
1	PowerData8	8.25			TTAA	2339
2	PowerData8-Tray8-(TTBE)*	16.25			TTAB	2478
3	(TTBE)*-UtilityBin8-Tray4-Tray2-Tray2	16.25			TTAC	2042

	Vent Grills, MRBAS Finish	w	2.8d	1.5h	ProductNo.	List \$
	Vent 16w	16			TTV16	906
4	Vent 24w	24			TTV24	1019
	Vent 32w	32			TTV32	1246
	Vent 40w	40			TTV40	1817
	Vent 52w	52			TTV52	1932


	Parametric Width	w	d	h	Product Prefix	\$/Inch	\$ Minimum
5	Brush Grommet	2 to 72	2.8	2	TTBE	61	711
6	2.8d In-line Fixed Plate	2 to 72	2.8	0.25	TTBG	105	874
7	1.5d Tandem Fixed Plate	2 to 72	1.5	0.25	TTBF	87	708

+ Options/Parametrics:
Widths: 2-72. Append width to product prefix; multiply width by \$/Inch for list price (note \$ Minimum).
Units are softplug with a 72-in cord. For hardwire unit, specify HW; hardwire units have 72-in hardwire whip.
! Notes:
Use TTAA PowerData8, TTV Vents and TTBE Brush Grommets solo or in-series with other modules.
Lids and vents are MRBAS Resin Brushed Aluminum w Steel Tint; other components are MRG Resin Black.
Modules with PowerData8, TTAB and TTAC, includes duplex outlet, (1) USB-A (2.1 amps),
(1) USB-C (18 watts), (1) RJ45 Cat 6 with whip, and (1) HDMI with whip.
* TTAB and TTAC units have an overhanging lid, width is nominal; a TTBE Brush Grommet (any width) must be added on the side indicated.

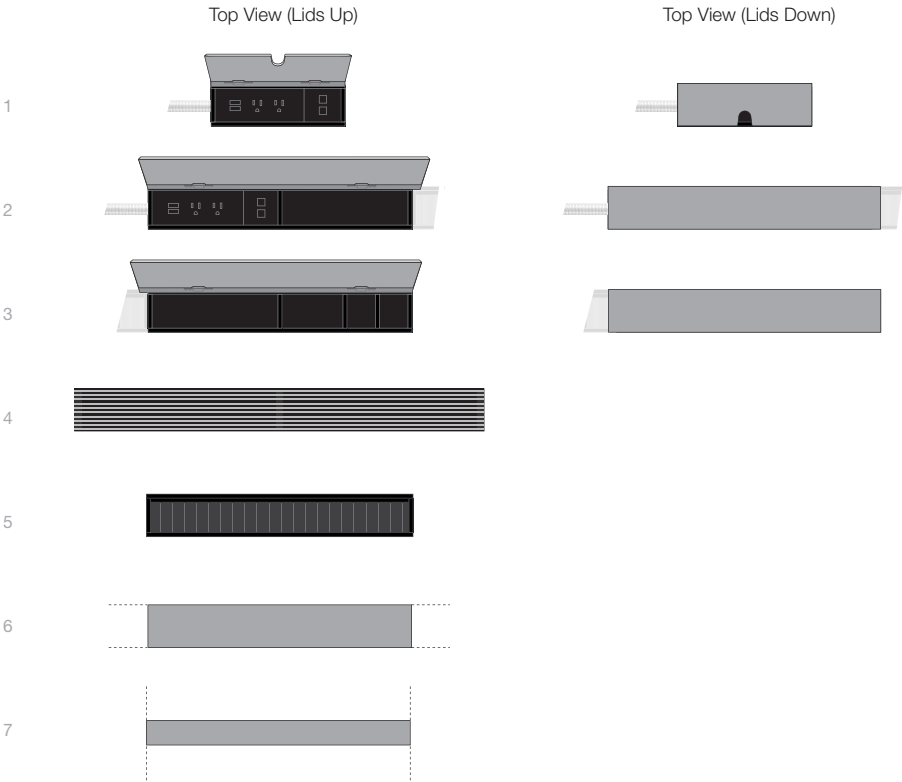

SURFACE POWER-DATA (cont.)

Power-Comm Troughs, Single



Single Recessed Trough		# Doors	# Modules	MRSA Finish	List \$
Power-Comm Single Trough	7w	1	1	SYT.S00.007	2271
Power-Comm Single Trough	12w	1	1	SYT.S00.012	2314
Power-Comm Single Trough	18w	1	1	SYT.S00.018	2359
Power-Comm Single Trough	24w	1	1	SYT.S00.024	2433
Power-Comm Single Trough	30w	1	1	SYT.S00.030	2490
Power-Comm Single Trough	36w	2	2	SYT.S00.036	3525
Power-Comm Single Trough	42w	2	2	SYT.S00.042	3631
Power-Comm Single Trough	48w	2	2	SYT.S00.048	3807
Power-Comm Single Trough	54w	2	2	SYT.S00.054	3884
Power-Comm Single Trough	60w	2	2	SYT.S00.060	3983
Power-Comm Single Trough	66w	2	2	SYT.S00.066	4136
Power-Comm Single Trough	72w	3	3	SYT.S00.072	5398
Power-Comm Single Trough	78w	3	3	SYT.S00.078	5466
Power-Comm Single Trough	84w	3	3	SYT.S00.084	5535
Power-Comm Single Trough	90w	3	3	SYT.S00.090	5612
Power-Comm Single Trough	96w	3	3	SYT.S00.096	5706
Power-Comm Single Trough	102w	3	3	SYT.S00.102	5858
Power-Comm Single Trough	108w	4	4	SYT.S00.108	6755
Power-Comm Single Trough	114w	4	4	SYT.S00.114	6941
Power-Comm Single Trough	120w	4	4	SYT.S00.120	7223
Power-Comm Single Trough	126w	4	4	SYT.S00.126	7324
Power-Comm Single Trough	132w	4	4	SYT.S00.132	7399
Power-Comm Single Trough	144w	5	5	SYT.S00.144	7891
Power-Comm Single Trough	150w	5	5	SYT.S00.150	8079
Power-Comm Single Trough	156w	5	5	SYT.S00.156	8243
Power-Comm Single Trough	162w	5	5	SYT.S00.162	9319
Power-Comm Single Trough	168w	5	5	SYT.S00.168	9560
Power-Comm Single Trough	180w	6	6	SYT.S00.180	10061


Notes:

Depth is 6.3 inches; width dimensions are 0.8 inches greater than nominal listings above.
One grounded triplex outlet per door, on center; outlets have a 10 foot cord; UL-approved.
Specify Connector Modules from following pages.
Standard finish is MRSA Resin Satin Aluminum on lids and housing; see options below.

Optional Materials, Lids only:	Change 6th digit to:	Add, per lineal inch (w):
Frosted Glass	G	\$ 3
Silex Faux-Leather	L	\$ 8
Solid Surface (Avonite® Polaris)	C	\$ 7


Optional Finish, Lids & Housing:	Specify:	Add, per lineal inch (w):
Brushed Nickel	Option BN	\$ 39

For hard-wired troughs with duplex outlets, add HW to the product number; add \$564 per door.
15 amp duplex
- One Type-A Port and one Type-C Port; combined total of 5.1A of charging power
- Type-A Port can charge maximum 2.4 Amps @ 5V
- Type-C Port can charge maximum 3 Amps @ 5V

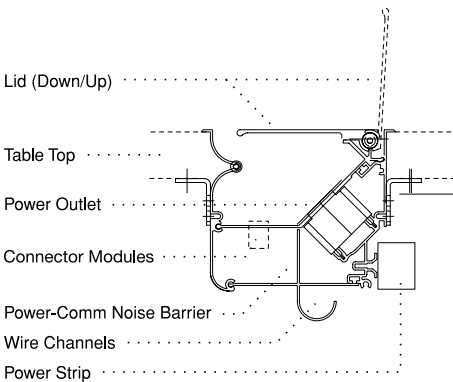

SURFACE POWER-DATA (cont.)

Power-Comm Troughs, Dual



Dual Recessed Trough		# Doors	# Modules	MRSA Finish	List \$
Power-Comm Dual Trough 7w		2	2	SYT.N00.007	3579
Power-Comm Dual Trough 12w		2	2	SYT.N00.012	3638
Power-Comm Dual Trough 18w		2	2	SYT.N00.018	3695
Power-Comm Dual Trough 24w		2	2	SYT.N00.024	3762
Power-Comm Dual Trough 30w		2	2	SYT.N00.030	3868
Power-Comm Dual Trough 36w		4	4	SYT.N00.036	6101
Power-Comm Dual Trough 42w		4	4	SYT.N00.042	6231
Power-Comm Dual Trough 48w		4	4	SYT.N00.048	6387
Power-Comm Dual Trough 54w		4	4	SYT.N00.054	6574
Power-Comm Dual Trough 60w		4	4	SYT.N00.060	6710
Power-Comm Dual Trough 66w		4	4	SYT.N00.066	7004
Power-Comm Dual Trough 72w		6	6	SYT.N00.072	9236
Power-Comm Dual Trough 78w		6	6	SYT.N00.078	9303
Power-Comm Dual Trough 84w		6	6	SYT.N00.084	9427
Power-Comm Dual Trough 90w		6	6	SYT.N00.090	9591
Power-Comm Dual Trough 96w		6	6	SYT.N00.096	9813
Power-Comm Dual Trough 102w		6	6	SYT.N00.102	10061
Power-Comm Dual Trough 108w		8	8	SYT.N00.108	11798
Power-Comm Dual Trough 114w		8	8	SYT.N00.114	12265
Power-Comm Dual Trough 120w		8	8	SYT.N00.120	12782
Power-Comm Dual Trough 126w		8	8	SYT.N00.126	12960
Power-Comm Dual Trough 132w		8	8	SYT.N00.132	13185
Power-Comm Dual Trough 144w		10	10	SYT.N00.144	14931
Power-Comm Dual Trough 150w		10	10	SYT.N00.150	15033
Power-Comm Dual Trough 156w		10	10	SYT.N00.156	15223
Power-Comm Dual Trough 162w		10	10	SYT.N00.162	15411
Power-Comm Dual Trough 168w		10	10	SYT.N00.168	15603
Power-Comm Dual Trough 180w		12	12	SYT.N00.180	18410




Notes:
Depth is 12.9 inches; width dimensions are 0.8 inches greater than nominal listings above.
One grounded triplex outlet per door, on center; outlets have a 10 foot cord; UL-approved.
Specify Connector Modules from following pages.
Standard finish is MRSA Resin Satin Aluminum on lids and housing; see options below.










Optional Materials, Lids only:	Change 6th digit to:	Add, per lineal inch (w):
Frosted Glass	G	\$ 6
Silex Faux-Leather	L	\$ 17
Solid Surface (Avonite® Polaris)	C	\$ 15

Optional Finish, Lids & Housing:	Specify:	Add, per lineal inch (w):
Brushed Nickel	Option BN	\$ 79

For hard-wired troughs with duplex outlets, add HW to the product number; add \$564 per door.
15 amp duplex
- One Type-A Port and one Type-C Port; combined total of 5.1A of charging power
- Type-A Port can charge maximum 2.4 Amps @ 5V
- Type-C Port can charge maximum 3 Amps @ 5V

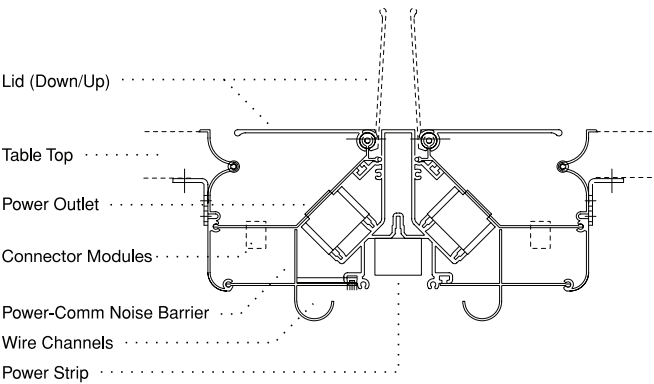




		POWER-COMM TROUGH CONNECTORS + PLATE	
		PRODUCT NO.	LIST \$
COMPONENTS			
Preset Module 1	Dual RJ-45	MODULE1	382
	1 (blank) 2 Neutrik Cat6A RJ-45 (NE8FDX-P6-B) 3 Neutrik Cat6A RJ-45 (NE8FDX-P6-B) 4 (blank)		
Preset Module 2	Triple RJ-45	MODULE2	497
	1 Neutrik Cat6A RJ-45 (NE8FDX-P6-B) 2 Neutrik Cat6A RJ-45 (NE8FDX-P6-B) 3 Neutrik Cat6A RJ-45 (NE8FDX-P6-B) 4 (blank)		
Preset Module 3	Quad RJ-45	MODULE3	607
	1 Neutrik Cat6A RJ-45 (NE8FDX-P6-B) 2 Neutrik Cat6A RJ-45 (NE8FDX-P6-B) 3 Neutrik Cat6A RJ-45 (NE8FDX-P6-B) 4 Neutrik Cat6A RJ-45 (NE8FDX-P6-B)		
Preset Module 5	VGA and 3.5mm, Dual RJ-45	MODULE5	456
	1 RCI 15-Pin HD 2 3.5 mm Audio 3 Neutrik Cat6A RJ-45 (NE8FDX-P6-B) 4 Neutrik Cat6A RJ-45 (NE8FDX-P6-B)		
Preset Module 7	HDMI, Dual RJ-45	MODULE7	502
	1 Neutrik HDMI (NAHDMI-W-B) 2 Neutrik Cat6A RJ-45 (NE8FDX-P6-B) 3 Neutrik Cat6A RJ-45 (NE8FDX-P6-B)		
Preset Module 15	Dual Extron MAAP Opening, RJ-45	MODULE15	316
	1-3 Any (2) single MAAP plates or (1) Dual MAAP plate 4 Neutrik Cat6A RJ-45 (NE8FDX-P6-B)		
Preset Module 16	Two (2) Dual Extron MAAP Openings	MODULE16	321
	1-4 Any (2) single MAAP plates per cutout or (1) Dual MAAP Plate per cutout		
Preset Module 17	Two (2) Dual Extron AAP Openings	MODULE17	321
	1-4 Any (2) single AAP plates or (1) Dual AAP Plate		
Connector Module Plate	Plate Only	MODULEBLANK	161
	1-4 (Blank)		

All modules are 6 inches in width and are to be site-wired.
List the modules in the order they are to be applied left-to-right.
Use Connectors+Plate for Power-Comm Troughs.

ORDER CUSTOM MODULES BY ENTERING A CONNECTOR CODE FOR EACH POSITION AT RIGHT (ENTER 'B' FOR BLANK, ADD ZERO \$).
INCLUDE A BLANK PLATE FROM PRIOR PAGE.

TOTAL COST IS THE SUM OF THE CONNECTOR \$ + BLANK PLATE \$:
EXAMPLE: C37 - __ - C34 - C36 = \$282 (60 + 125 + 97), PLUS \$161 FOR PLATE.

-	-	-	-
1	2	3	4

	DESCRIPTION	CODE	LIST \$
Voice / Data			
	Neutrik Cat6 RJ-45 (NE8FDV-Y110-B) 110 Punch Down	C28	147
	Neutrik Cat6A RJ-45 (NE8FDX-P6-B) Female-to-Female Pass-Thru	C30	225
VGA			
	Calrad 15-Pin HD Female-to-Female Pass-Thru	C31	174
Audio			
	3.5 mm Audio Female-to-Female Pass-Thru	C32	87
Video			
	Neutrik HDMI (NAHDMI-W-B) Female-to-Female Pass-Thru	C33	228
	Archtec HDMI HDMI-to-Tail with 4-in whip	C34	125
	Calrad Display Port Female-to-Female Pass-Thru	C35	219
Computer			
	Neutrik USB 2.0 Type A and B (NAUSB-W-B) Female-to-Female Feed-Thru	C36	97
Grommet			
	3/4-in Grommet	C37	60
USB-A			
	Byrne Dual USB-A Charging 2.1 amp per port 72-in cord	C38	311
USB-C			
	Byrne USB-C Charging 60 watt power supply 72-in cord	C39	504

